




## Touch'N-Go™ WindowTouch™

### What is WindowTouch™ ?

*Sirius WindowTouch™* provides a uniquely versatile Touch-Screen solution that can be used to touch-enable a shop window or other large glass surface in sizes up to 80" diagonal, using a *Sirius Through Glass "L" Frame* in conjunction with a Rear Projection, Plasma, LCD, or CRT Display.

The slim dimensions mean that Sirius Through Glass "L" Frames can be easily integrated into numerous business solutions such as Shop Windows, Demonstrations and Event Displays!

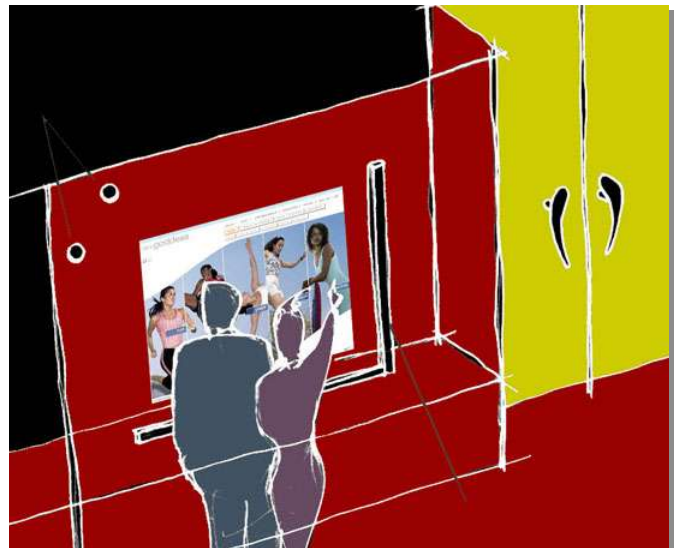

### Features:

- Turns a window or other glass surface into a Touch Screen using a standard Rear Projection Unit, Plasma, LCD or CRT Display.
- Advanced Optical - Imaging technology.
- Can accommodate a Rear Projected Image in sizes up to 42" Plasma, or 40" LCD/CRT.
- Any Touch method can be used - finger, gloved hand, hard or soft stylus.
- Light touch - no touch pressure is required. Actual touch registers 1mm (0.04") before the physical touch contacts the Touch Surface.
- Scratch Resistant.  
Even if there are scratches on the Touch Surface, these will not affect the Touch Screen operation, but utilising the recommended Tempered Glass will minimise the risk of scratching.
- No overlays - therefore no image loss.  
Cost effective. Versatility in addressing various needs from one location spreads investment cost.
- Simple Integration.  
The Touch Screen attaches to the computer through a standard Serial Cable (up to 3 metres long). The Data Projector connects to the computer via standard Shielded VGA Cable. Simple!!
- Optical Imaging.  
Sophisticated optical imaging is used without overlays - therefore, no image loss.
- Modular Sirius Touch Screen facilitates servicing.  
The Sirius Touch Screen is a component-based system with modular, replaceable parts.

## Specification:

Physical Dimensions (with Bezel)	
• Max. External:	850mm x 650mm (33.5" x 25.5" approx.)
• Projectable Area:	750 x 550mm (30" x 22" approx.)
• Depth:	60mm (2.4" approx.)
Frame/Bezel Colour:	Silver, Black
Supported Operating Systems:	Windows XP™ Windows 2000™
Touch Type:	Optical Imaging - no overlays, 100% image clarity
Touch Per Second:	>40 touches per second
Touch Stylus:	Finger, gloved hand, hard or soft stylus
Operating Environment:	
• Temperature:	0 - 60 °C – depending on the Monitor used.
• Humidity:	0% - 90% non-condensating
Power:	17W
• Usage:	Universal Voltage
Mounting Requirements:	As per Customer Requirements
Warranty:	12 months
Interfaces:	Serial – 9 Pin D-connection. Multiple serial connection speeds supported - Baud rate 9600 and 115200.
Touch Screen Weight:	Total Weight approx. 2kg
Software:	Sirius TouchStarter™ Sirius PanelDesigner™
Component List:	'L' Bezel Camera Bar Serial Cable (up to 3 metres long)



Want to know more about our solution  
Please call (852) 2951 7336  
or E-mail us at [sales@siriushk.com](mailto:sales@siriushk.com)

SIRIUS INTERNATIONAL (HONG KONG) LIMITED  
16/F, Futura Plaza, 111 How Ming Street,  
Kwun Tong, Kowloon, Hong Kong.  
Tel: (852) 2749 9825 Fax: (852) 2398 7605  
Email: [info@siriushk.com](mailto:info@siriushk.com)  
Website: [www.siriushk.com](http://www.siriushk.com)